

2014


New Product Brochure

Furniture, Cabinet and Display Lighting Systems



Hera[®]
Light Years Ahead.

SPS-Shelf Power System

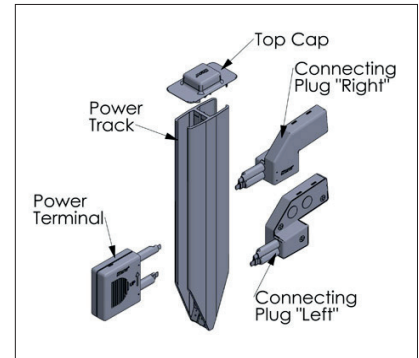

The Easiest Way To Integrate Lighting Into Gondola Shelving

The new Shelf Power System works with Hera's 24 V LED lighting and allows you to quickly and effortlessly re-merchandise and reset shelving displays without altering the lighting in any way. Benefits of this new system are quick shelving changes, flexibility, fast installation, and it is aesthetically pleasing with no visible wires.


Product-Features

- Power Track is designed for Lozier gondolas with other track designs available
- Track available in two lengths: 72" and 96". Different lengths can be achieved by cutting to size
- System consists of several parts, depending on the type of lighting used:
 - Top Cap
 - Power Track
 - Power Terminal
 - LED Driver
 - Connecting Plug "Right"
 - Connecting Plug "Left"
 - Shelf Power Cords
 - Stick2-LED, StickVE-LED, Stick2HO-LED, TwinStick2-LED or TwinStick2HO-LED
 - Magnetic mounting clips


Four Simple Steps



Step One:
Insert Power Track
into gondola




Step Two:
Attach magnetic Power Terminal
onto shelf and insert into gondola



Step Three:
Plug lighting into Shelf
Power Cord



Step Four:
Plug Power Terminal into
gondola and driver into outlet



What you'll need to buy

Light Fixtures

SPS Shelf Power System

| Description | Code No. |
|--|------------------|
| Power Track 72" w/ Top Cap | SPS/TRACK/72 |
| Power Track 96" w/ Top Cap | SPS/TRACK/96 |
| Constant Voltage Driver 75 W with Power Terminal | SPS/PT/75 |
| Connecting Plug "right" | SPS/PLUG/SH/R |
| Connecting Plug "left" | SPS/PLUG/SH/L |
| 12" Power Cord for 13" Shelf | SPS/STICK2PC/12 |
| 17" Power Cord for 18" Shelf | SPS/STICK2PC/17 |
| 23" Power Cord for 24" Shelf | SPS/STICK2PC/23 |
| Magnetic Mounting Clips | STICK2/MC/MAGNET |

Lighting Options*

Warm White


| Description | Code No. |
|-------------------|---------------|
| 8" Stick2-LED | STICK2/8/WW |
| 12" Stick2-LED | STICK2/12/WW |
| 34" Stick2-LED | STICK2/34/WW |
| 46" Stick2-LED | STICK2/46/WW |
| 12" Feed-In Stick | STICK2/WPC/WW |

Cool White

| Description | Code No. |
|-------------------|---------------|
| 8" Stick2-LED | STICK2/8/CW |
| 12" Stick2-LED | STICK2/12/CW |
| 34" Stick2-LED | STICK2/34/CW |
| 46" Stick2-LED | STICK2/46/CW |
| 12" Feed-In Stick | STICK2/WPC/CW |

* Can also be used with Stick2-LED, StickVE-LED, Stick2HO-LED, TwinStick2-LED, TwinStick2HO-LED

ELite-LED





The Most Economical Way To Upgrade from Fluorescent to LED

The brand new ELite-LED is the perfect solution for new installation where lower upfront costs are required. It is a very price effective way to upgrade existing fluorescent fixtures to the latest trend in LED lighting. The ELite-LED uses half the energy of T5 fluorescents with the same light output and has more than twice the lifetime.




Product-Features

- 120 Vac LED with integrated electronic driver
- Available in five different sizes: 1' (5 W), 2' (9 W), 3' (12 W), 4' (15 W), 5' (18 W)
- Extremely long lifetime of 50,000 hours
- Available in 3000K, 4100K, 5000K and 6500K
- Good energy efficiency, 64-86 lm/W
- Very good color rendering >80
- Finish: White housing with white frosted lens
- Fixtures can interconnect with direct connectors or accessory cables
- Quick and easy plug and play installation
- Optional hardwire adaptor box available
- Magnetic mounting clips available
- Non-dimmable

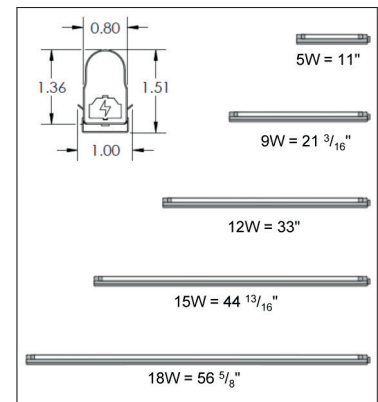

| Fixture | Length | Watts | Max Interconnected |
|-----------|------------|-------|--------------------|
| EL/LED/12 | 11 " | 5 W | 20 |
| EL/LED/22 | 21 3/16 " | 9 W | 18 |
| EL/LED/34 | 33 " | 12 W | 16 |
| EL/LED/46 | 44 13/16 " | 15 W | 12 |
| EL/LED/59 | 56 5/8 " | 18 W | 8 |



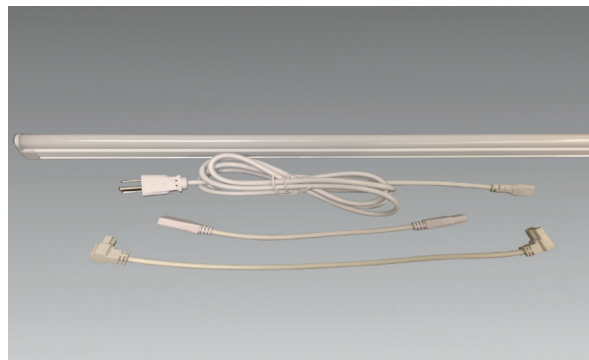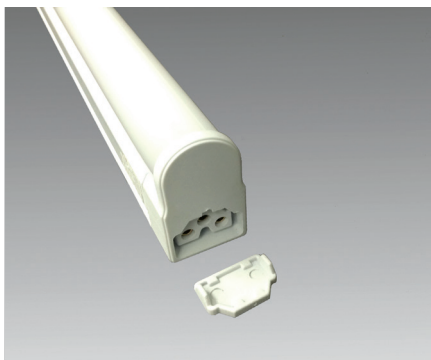

What you'll need to buy

Light Fixtures

E-Lite-LED

Warm White

| Length | Watt | Lumens | Code No. |
|--------|------|--------|--------------|
| 1' | 5 W | 320 | EL/LED/12/WW |
| 2' | 9 W | 700 | EL/LED/22/WW |
| 3' | 12 W | 950 | EL/LED/34/WW |
| 4' | 15 W | 1250 | EL/LED/46/WW |
| 5' | 18 W | 1550 | EL/LED/59/WW |

Cool White

| Length | Watt | Lumens | Code No. |
|--------|------|--------|--------------|
| 1' | 5 W | 320 | EL/LED/12/CW |
| 2' | 9 W | 700 | EL/LED/22/CW |
| 3' | 12 W | 950 | EL/LED/34/CW |
| 4' | 15 W | 1250 | EL/LED/46/CW |
| 5' | 18 W | 1550 | EL/LED/59/CW |

Power Cords

| | Length | Code No. |
|-----------|--------|-------------|
| With Plug | 72" | EL/LED/PC72 |
| | 96" | EL/LED/PC96 |

Connecting Cables

| | Length | Code No. |
|---------------------|--------|-----------------|
| Straight Connector | 6" | EL/LED/CC6 |
| | 12" | EL/LED/CC12 |
| | 24" | EL/LED/CC24 |
| | 36" | EL/LED/CC36 |
| | 48" | EL/LED/CC48 |
| 90 Degree Connector | 6" | EL/LED/CC6/90 |
| | 12" | EL/LED/CC12/90 |
| | 24" | EL/LED/CC24/90 |
| | 36" | EL/LED/CC48/90 |
| | 48" | EL/LED/CC72/90 |
| | 72" | EL/LED/CC96/90 |
| | 96" | EL/LED/CC132/90 |
| | 144" | EL/LED/CC144/90 |

Accessories

| | Code No. |
|--------------|----------|
| Hardwire Box | EL2HWB |




90 degree connector

Case-LED



LED Display Case Lighting


The brand new Case-LED is the perfect solution for any type of glass display case. The housing serves as a reflector which provides an anti-glare design and the LEDs provide lower energy costs and produce virtually no heat. The stems and length come in several sizes which allow an even light distribution throughout the entire case.





Wiring Diagram

Product-Features

- 24 Vdc Constant Voltage LED system
- Available in four lengths for LEDs: 22" (12 W), 34" (21.6 W), 46" (31.2 W) and 58" (40.8 W) with other lengths available by special order
- Mounting Stem available in six heights: 7.75", 8", 10.5", 11.25", 15" and 18.75"
- Standard color temperatures are 3000K, 4000K, 5000K
- Matte Stainless Steel finish
- Extremely long lifetime of 50,000 hours

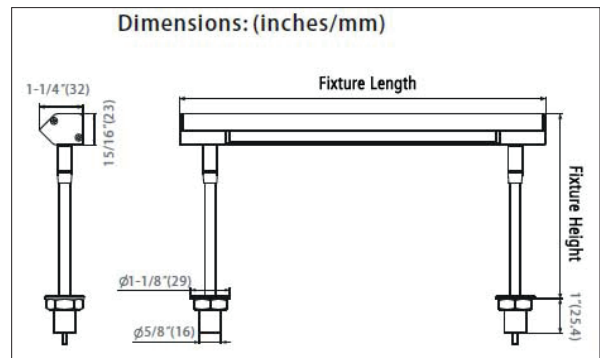

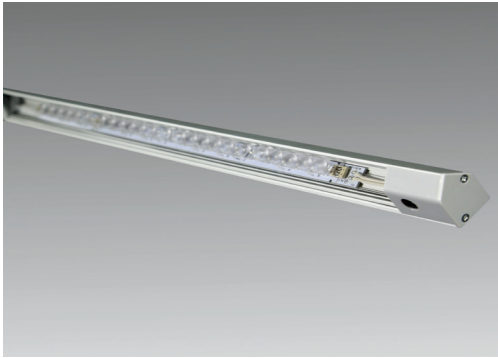

What you'll need to buy

Light Fixtures

Case-LED



Standard Fixture Lengths

| Description | Watt | Code No. |
|-------------|--------|-----------|
| 22" | 12 W | DCL30/22 |
| 34" | 21.6 W | DCL54/34 |
| 46" | 33.6 W | DCL78/46 |
| 58" | 40.8 W | DCL102/58 |

Standard Fixture Heights (mounting stem)

| Description | Code No. |
|-------------|----------|
| 7.75" | DCLS7 |
| 8" | DCLS8 |
| 10.5" | DCLS10 |
| 11.25" | DCLS11 |
| 15" | DCLS15 |
| 18.75" | DCLS18 |


Product Number Explanation

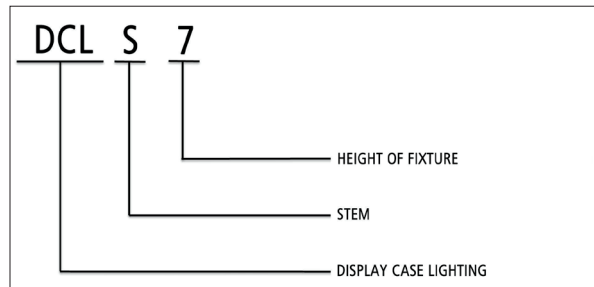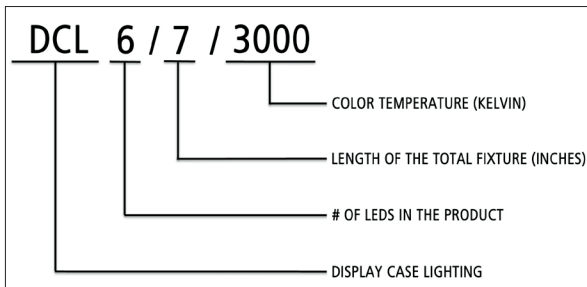

LED Power Supply

| Description | Code No. |
|---------------------------------|-----------------|
| Constant Voltage Driver 6 Watt | STICKPS24/6WATT |
| Constant Voltage Driver 30 Watt | STICKPS24/30 |
| Constant Voltage Driver 75 Watt | STICKPS24/75 |

TapeVE-LED/LO

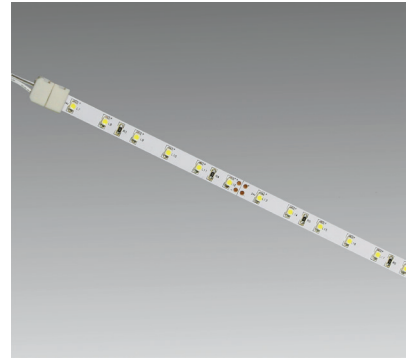

Low Output, Flexible Linear Lighting

TapeVE-LED/LO is a flexible linear lighting solution with the same benefits as the TapeVE-LED, only with a lower light output and utilizing less energy. It uses the same power supplies as our 24V system, and is available with either a soldered or quick connect system.

Product-Features

- Self Adhering, Flexible LED strip, 1.5 W/ft., 24 W/5m Reel
- 24 Vdc Constant Voltage LED system
- Extremely long life, rated at 50,000 hours
- Available in color temperatures of 3000K, 4100K 5000K and 6500K
- Finish: white tape with exposed LEDs; no UV rays
- Can be cut in 3 15/16" increments. 6 LEDs/0.5 W per section, 1.5 W /ft.
- One full roll per power cable (20 sections)
- Quick and easy installation
- Sold in 196" rolls
- 18 LEDs/ft. & 300 LEDs per roll
- Dimmable with optional accessories
- Product size: 196" x 5/16"



No minimum
Clearance



What you'll need to buy

Light Fixtures

TapeVE-LED/LO

| Color | Code No. |
|-------|--------------------|
| 3000K | TAPEVE-LED/LO/3000 |
| 4100K | TAPEVE-LED/LO/4100 |
| 5000K | TAPEVE-LED/LO/5000 |
| 6500K | TAPEVE-LED/LO/6500 |

LED Power Supply

| Description | Code No. |
|---------------------------------|-----------------|
| Constant Voltage Driver 6 Watt | STICKPS24/6WATT |
| Constant Voltage Driver 30 Watt | STICKPS24/30 |
| Constant Voltage Driver 75 Watt | STICKPS24/75 |


Cables and Connectors

| Description | Code No. |
|--------------------------|--------------------|
| Power Cord | TAPEVE-LED/LO/PC-N |
| Connecting Cable 6" | TAPEVE-LED/LO/CC6 |
| Connecting Cable 12" | TAPEVE-LED/LO/CC12 |
| Power Cord Extension 39" | KB12LEDCC39 |
| Power Cord Extension 98" | KB12LEDCC98 |
| Direct Connector | TAPEVE-LED/LO/DC |
| Terminal Block | STICKTB |

Optional Accessories

| Description | Code No. |
|---------------------------|-----------------|
| Dimmer | STICKPSDIM |
| Dimmer Controller | DIMCONTROL |
| Dimming Distributor Cable | STICKDIM/YCABLE |
| Low Voltage Switch | IRSWITCH |
| Remote Control Dimmer | RCPSDIM |
| Rocker Switch | SWITCH/PS24 |

SlimLite XL-LED Replacement Lamp


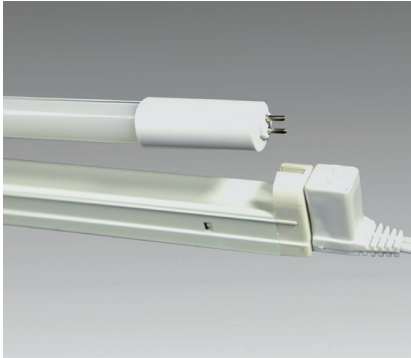



Replace Current SlimLite XL Fluorescent Fixtures with LED

These brand new LED replacement lamps are to be used to upgrade existing SlimLite XL Fluorescent fixtures to the latest LED technology. It is a direct T5 lamp replacement with no wiring needed. Enjoy the benefits of LEDs such as immediate energy reduction and high, even light output. It is stocked in three sizes and three color temperatures.

Product-Features

- Direct T5 lamp replacement for SlimLite XL Fluorescent
- Reduced energy consumption of almost 50% for the ballast
- Extremely long bulb life of 35,000 hours
- Available in three lengths: 22" (8 W), 34" (12 W) and 46" (16 W)
- 59" (20 W) available by special order
- Color temperatures available in 3500K, 4100K and 5500K
- CRI >80
- 75 lm/W - 93 lm/W

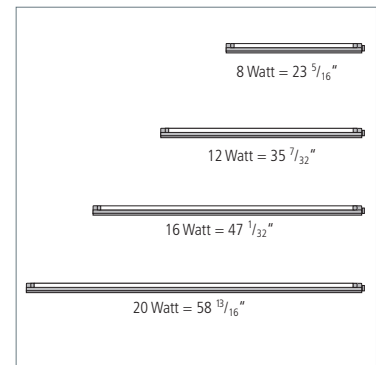



What you'll need to buy

SlimLite XL-LED Replacement Bulbs

| Length | Color | Lumens | Watt | Code No. |
|--------|-------|--------|------|------------|
| 22" | 3500K | 600 | 8 | SLB22/3500 |
| | 4100K | 600 | 8 | SLB22/4100 |
| | 5500K | 750 | 8 | SLB22/5500 |
| 34" | 3500K | 900 | 12 | SLB34/3500 |
| | 4100K | 900 | 12 | SLB34/4100 |
| | 5500K | 1100 | 12 | SLB34/5500 |
| 46" | 3500K | 1300 | 16 | SLB46/3500 |
| | 4100K | 1300 | 16 | SLB46/4100 |
| | 5500K | 1500 | 16 | SLB46/5500 |
| 59" * | 3500K | 1600 | 20 | SLB59/3500 |
| | 4100K | 1600 | 20 | SLB59/4100 |
| | 5500 | 1800 | 20 | SLB59/5500 |

* 59" Available as special order only



Hera[®]

Hera Lighting L.P
3025 Business Park Drive
Norcross, GA 30071

Telephone (770) 409-8558
Telefax (770) 409-8531
Toll free (800) 336-4372

www.heralighting.com

Subject to technical changes without prior notice. Position as per 2/2014